



NEW STOCKLINE

# Fluid Connector Seals for Threaded Connectors

ED Seals according to DIN 3869



These elastomer seals are used as axial static seals for threaded ports and stud ends in hydraulic fluid power applications. The cross section remains constant even under high pressure.


## Features



- Low leakage even when used with low-visous media
- Compensation of manufacturing tolerances
- Easy handling
- Suitability for reassembly

Exclusively distributed by

Pacific Seals, 1D Quadrant Drive, Gracefield, Lower Hutt [www.pacificseals.co.nz](http://www.pacificseals.co.nz) 04 566 3180

0800 822 722



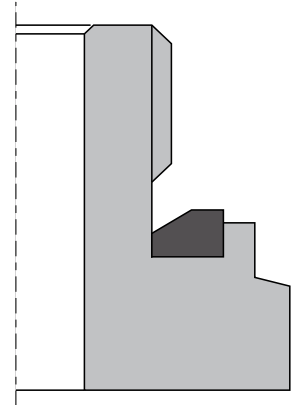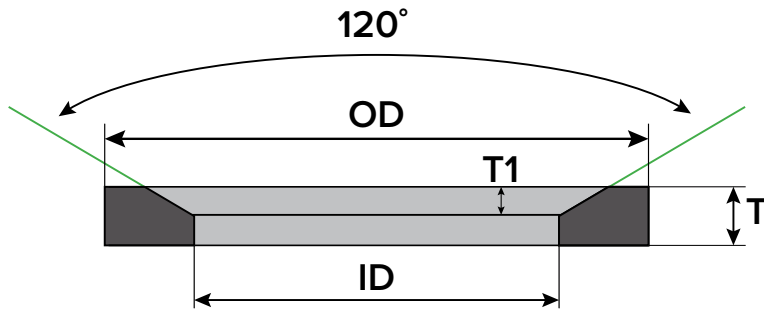

## Available DIN 3869 dimensions

COMPOUD NBR Black 85 ±5

PART NO.	(ID)	(OD)	(T)	(T1)	THREAD	
					Metric	Inch
42828	6.5	9.9	1.0	0.5	M 8	–
42829	8.4	11.9	1.0	0.5	M 10	G 1/8"
42830	9.8	14.4	1.5	0.8	M 12	–
42825	11.6	16.5	1.5	0.8	M 14	G 1/4"
42831	13.8	18.9	1.5	0.8	M 16	–
42835	14.7	19.9	1.5	0.8	M 17	G 3/8"
42836	15.7	20.9	1.5	0.8	M 18	–
42837	17.8	22.9	1.5	0.8	M 20	–
42826	18.5	23.9	1.5	0.8	M 21	G 1/2"
42838	19.6	24.6	1.5	0.8	M 22	–
42839	21.6	26.3	1.5	0.8	M 24	–
42827	23.9	29.2	1.5	0.8	M 26	G 3/4"
42857	23.9	29.2	1.5	0.8	M 27	G 3/4"
42858	29.7	35.7	2.0	1.0	M 33	G 1"
42859	38.8	45.8	2.0	1.0	M 42	G 1 1/4"
42819	44.7	50.7	2.0	1.0	M 48	G 1 1/2"
42860	56.5	66.5	4.0	2.0	M60	G 2"
42861	72.0	86.0	5.0	2.5	M 75	G 2 1/2"

Exclusively distributed by

Pacific Seals, 1D Quadrant Drive, Gracefield, Lower Hutt [www.pacificseals.co.nz](http://www.pacificseals.co.nz) 04 566 3180

0800 822 722

